

SERIES 20

MODEL 206

2-Piece ISO 5211

Direct Mounted Ball Valve

Threaded



Pressure Rating PN64 (1/2"-2")
PN50 (2 1/2"-3")

Material EN10213-1.4408, ASTM A351-CF8M



Seat TFM1600, 25%, 50%

Bore Type Full bore

Additional Features ISO 5211 direct mounting pad

MATERIALS LIST

NO.	PART NAME	QTY	MATERIAL
1	BODY	1	1.4408 (CF8M)
2	END CAP	1	1.4408 (CF8M)
3	BALL	1	SUS316
4	STEM	1	SUS316
5	PACKING	1	PTFE
6	SEAT	2	TFM1600
7	STEM SEAL	1	R.PTFE
8	O-RING	1	VITON
9	V-RING PACKING	1SET	PTFE
10	BUSHING	1	50% S.S. POWDER FILLED PTFE
11	GLAND	1	SUS304
12	BELLEVILLE WASHER	2	SUS304
13	STEM NUT	2	SUS304
14	LOCK SADDLE	1	SUS304
15	WASHER	1	SUS304
16	HANDLE	1	SUS304
17	HANDLE SLEEVE	1	VINYL
18	STOP PIN	1	SUS304
19	STOP PIN NUT	1	SUS304

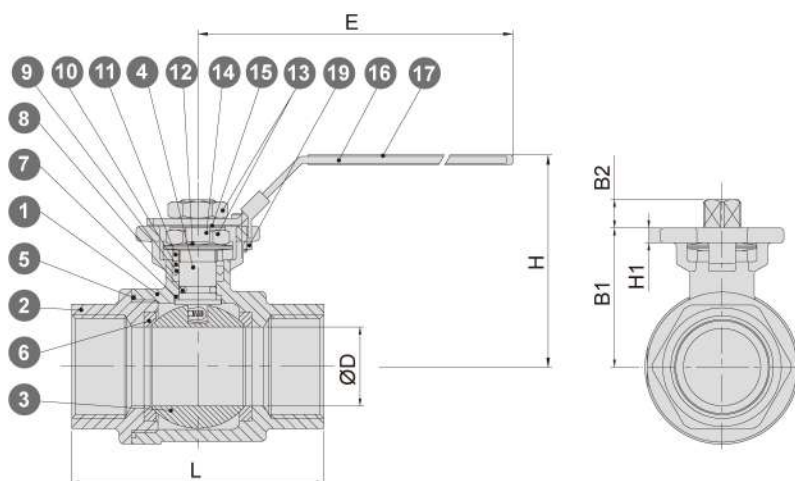

DIMENSIONS (mm)

SIZE	B1	B2	ØD	E	ØG	H	H1	ØI	L	ØM	ØM1	ISO 5211
1/2"	35.6	9	15	128	42	65.9	5	9	65	6	6	F03 F04
3/4"	38.8	9	20	128	42	69.2	5	9	74.6	6	6	F03 F04
1"	52.2	14	25	167	50	85.6	6	11	88	6	7	F04 F05
1 1/4"	56.5	14	32	167	50	90	6	11	100.6	6	7	F04 F05
1 1/2"	65.7	15.5	38	215	70	99.6	7	14	109	7	9.2	F05 F07
2"	73.95	15.5	50	215	70	107.8	7	14	123.6	7	9.2	F05 F07
2 1/2"	94	16.5	65	322	100	146.7	10.5	17	159.6	9	11	F07 F10
3"	103	16.5	80	322	100	155.7	10.5	17	173.8	9	11	F07 F10

SERIES 10

SERIES 20

SERIES 30

SERIES 70

SERIES 85

SERIES 90

SERIES 95

SERIES
MPY / MP

OTHER VALVES
AND
VALVE PARTS

PRESSURE
TEMPERATURE
RATINGS